




PADDY CLEANER MACHINE



TQLZ series reciprocating separator is suitable for cleaning raw grain for grain processing plant and grain storage. The sieve of different specification can separate large, small and light impurities from wheat, paddy, corn and oil bearing materials. It is designed with double-decked sieve, and good seal. It has much better effects especially for big impurities contained in grain. It is also used for granule separation in food and chemical industry.

Feature

- Compact construction, well seal.
- Low noise, low power consumption.
- Stable movement, well cleaning effect, higher production efficiency.
- Driven by vibrating motor, the vibrating force, vibrating direction and inclination of sieve cover can be adjusted according to the requirement.

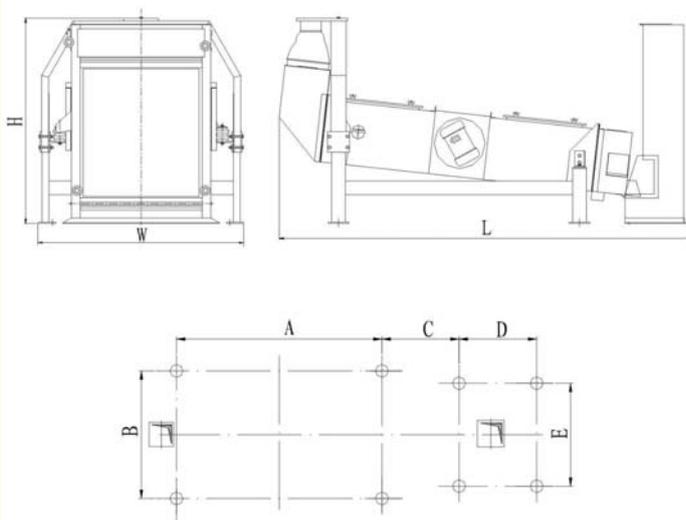

型号	L	W	H	A	B	C	D	E
TQLZ150×200	2616	1995	1567	1680	1795	325	428	1581
TQLZ125×200	2703	1758	1512	1700	1558	340	428	1336
TQLZ100×200	2640	1486	1567	1746	1286	325	428	1076
TQLZ80 ×150	2455	1286	1450	1246	1136	352	373	876

Technical Datas

Mode	TQLZ125	TQLZ150	TQLZ180
Capacity(t/h), Paddy	5-7	8-9	11-13
Wind Inking Volume(m ³ /h)	5000-5500	6000-7000	7200-8100
Size of Screen(mm)	1250x2000	1500x2000	1800x2000
Power(kw)	0.37x2	0.45x2	0.55x2
Weight(kg)	800	1000	1100
Optional Blower(kw)	7.5	7.5	11

SHENZHEN UME INTERNATIONAL CO., LTD.

Add: No. 1107C, Block A, Galaxy Century Building, Southwest Junction of Shennan Avenue and Caitian Road, Futiantian District, Shenzhen, China. Tel: 0086-755-23985650; Fax: 0086-755-23985650; E-mail: hater07@163.com;

UME GLOBAL IMPEX LTD.

Add: 161/2, 2nd Floor, Bir Uttam C.R. Data Road, Old Sonargoan Road Ans Amir Plaza, Suite-5F, Boro Maghbazar, Dhaka.

Tel: 01713 718971